


Glow Pebble Wall light

Family code 25W3PEB21X · collection Glow · Absinthe Lights

The Glow Pebble is a flattened surface-mounted globe in Ø150 mm opal glass, at 112 mm the shallowest in the Glow range. Rated IP44 up to bathroom zone 2, driver on board.

PRODUCT

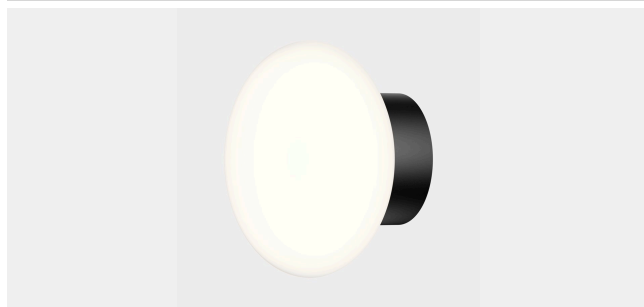

FEATURES

- Surface mounted on ceiling and wall, 112 mm projection
- 560 lm at 6W, 3000K, CRI 90
- Leading edge and trailing edge


LIGHT SOURCE

Light source	Integrated LED
Number of light points	1
Light source included	Yes
Luminous flux	560 lm
Power	6W
Efficacy	93.33 lm/W
Colour temperature	3000K
Colour rendering (CRI)	90
Lifetime	30000h
LED replaceable	Not replaceable
Energy class	F
Dimmable	Yes — Phase-cut leading-edge (TRIAC), Phase-cut trailing-edge (ELV)

ELECTRICAL

Mains voltage	230V
Driver included	Yes
IP rating	IP44
Protection class	Class II (double insulated)

DIMENSIONAL DRAWING

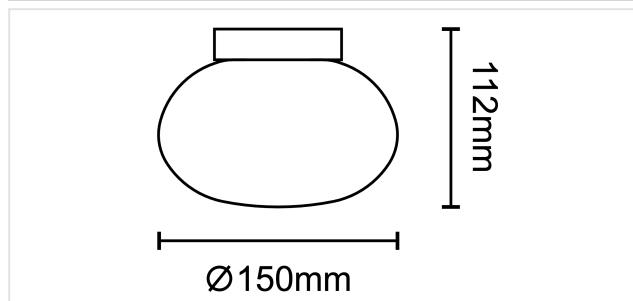

Dimensions in mm. Not to be used as an installation drawing.

ITEM NUMBERS AND EAN

ITEM NUMBER	VERSION	EAN	EPREL
25W3PEB21B3	Black	5407004003504	2680888
25W3PEB21W3	White	5407004003511	2680927
25W3PEB21BA3	Brushed brass	5407004003535	2680923
25W3PEB21BBR3	Brushed bronze	5407004003528	2680925

INSTALLATION

Mounting location	Ceiling · Wall
Mounting type	Surface
Use	Interior
Adjustability	Fixed

DIMENSIONS

Width	150 mm
Height	150 mm
Depth	112 mm
Diameter	Ø150 mm
Mounting plate	Ø81 × D 7 mm

MATERIAL

Material	Aluminium
Finish	Powder coated
Diffuser	Opal glass

IN THE BOX

Included	Fixture, Light source, LED driver, Mounting hardware, Manual
----------	--

LOGISTICS AND STANDARDS

Warranty	5 years
HS code	9405 99 00
Country of origin	China

Installation. The electrical installation should be carried out by qualified personnel only, according to the regulations for electrical and mechanical safety in your country. Always switch off electricity supply before installation and maintenance.