


Glow Mount Wall light

Family code 25W3MOU21X · collection Glow · Absinthe Lights

The Glow Mount is a surface-mounted wall light with a Ø160 mm opal glass globe, integrated LED and driver on board. Rated IP44 up to bathroom zone 2, for wet rooms and circulation areas.

PRODUCT

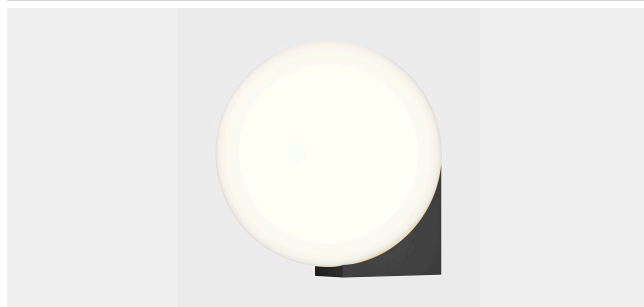

FEATURES

- Surface mounted on the wall, 167 mm projection
- 850 lm at 8W, 3000K, CRI 90
- Leading edge and trailing edge


LIGHT SOURCE

Light source	Integrated LED
Number of light points	1
Light source included	Yes
Luminous flux	850 lm
Power	8W
Efficacy	106.25 lm/W
Colour temperature	3000K
Colour rendering (CRI)	90
Lifetime	30000h
LED replaceable	Not replaceable
Energy class	F
Dimmable	Yes – Phase-cut leading-edge (TRIAC), Phase-cut trailing-edge (ELV)

ELECTRICAL

Mains voltage	230V
Driver included	Yes
IP rating	IP44
Protection class	Class II (double insulated)

DIMENSIONAL DRAWING

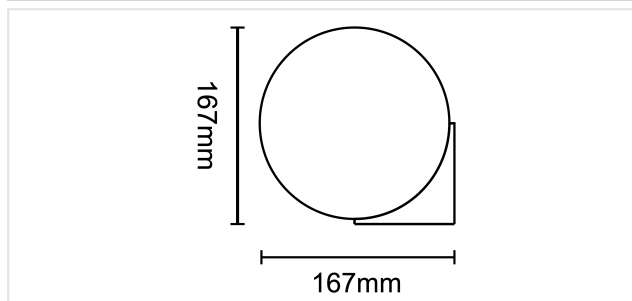

Dimensions in mm. Not to be used as an installation drawing.

ITEM NUMBERS AND EAN

ITEM NUMBER	VERSION	EAN	EPREL
25W3MOU21B3	Black	5407004003467	2674355
25W3MOU21W3	White	5407004003474	2674442
25W3MOU21BA3	Brushed brass	5407004003481	2674439
25W3MOU21BBR3	Brushed bronze	5407004003498	2674444

INSTALLATION

Mounting location	Wall
Mounting type	Surface
Use	Interior
Adjustability	Fixed

DIMENSIONS

Width	160 mm
Height	167 mm
Depth	167 mm
Diameter	Ø160 mm
Mounting plate	L 84.8 × W 32.8 × D 14.5 mm

MATERIAL

Material	Metal
Finish	Powder coated
Diffuser	Opal glass

IN THE BOX

Included	Fixture, Light source, LED driver, Mounting hardware, Manual
----------	---

LOGISTICS AND STANDARDS

Warranty	5 years
HS code	9405 99 00
Country of origin	China

Installation. The electrical installation should be carried out by qualified personnel only, according to the regulations for electrical and mechanical safety in your country. Always switch off electricity supply before installation and maintenance.