


Glow Mini Wall light

Item number 25W3MINI21W3 · collection Glow · Absinthe Lights

The Glow Mini is a compact surface-mounted globe in Ø120 mm opal glass for ceiling and wall, LED and driver on board. Rated IP44 up to bathroom zone 2, for wet rooms and circulation areas.

PRODUCT

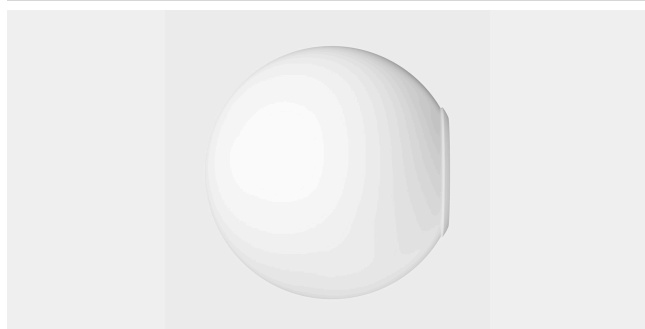

FEATURES

- Surface mounted on ceiling and wall, 115 mm projection
- 560 lm at 5W, 3000K, CRI 90
- Leading edge and trailing edge


LIGHT SOURCE

Light source	Integrated LED
Number of light points	1
Light source included	Yes
Luminous flux	560 lm
Power	5W
Efficacy	112 lm/W
Colour temperature	3000K
Colour rendering (CRI)	90
Lifetime	30000h
LED replaceable	Not replaceable
Energy class	E
Dimmable	Yes – Phase-cut leading-edge (TRIAC), Phase-cut trailing-edge (ELV)

ELECTRICAL

Mains voltage	230V
Driver included	Yes
IP rating	IP44
Protection class	Class II (double insulated)

DIMENSIONAL DRAWING

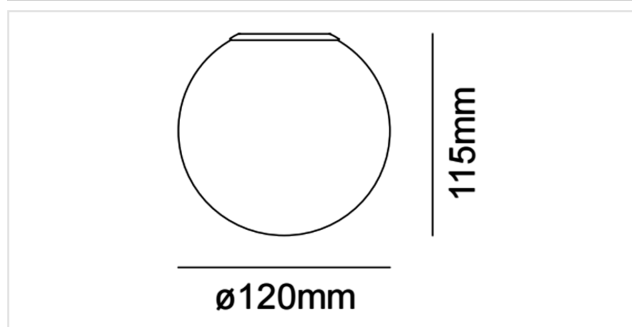

Dimensions in mm. Not to be used as an installation drawing.

ITEM NUMBERS AND EAN

ITEM NUMBER	VERSION	EAN	EPREL
25W3MINI21W3	White	5407004003450	2674324

INSTALLATION

Mounting location	Ceiling · Wall
Mounting type	Surface
Use	Interior
Adjustability	Fixed

DIMENSIONS

Width	120 mm
Height	120 mm
Depth	115 mm
Diameter	Ø120 mm
Mounting plate	Ø50 × D 2.5 mm

MATERIAL

Material	Aluminium
Finish	Powder coated
Diffuser	Opal glass

IN THE BOX

Included	Fixture, Light source, LED driver, Mounting hardware, Manual
----------	--

LOGISTICS AND STANDARDS

Warranty	5 years
HS code	9405 99 00
Country of origin	China

Installation. The electrical installation should be carried out by qualified personnel only, according to the regulations for electrical and mechanical safety in your country. Always switch off electricity supply before installation and maintenance.