

Box Surface mounted downlight

Family code 29C300011 · collection Box · Absinthe Lights

The Box surface-mounted downlight is a 90 × 60 × 60 mm ceiling luminaire with an integrated LED and a 37° beam. Switchable between 2700K and 3000K, dimmable, for dry indoor areas.

PRODUCT



FEATURES

- Surface mounted on the ceiling, 90 × 60 × 60 mm
- 542 lm at 9W, 2700K or 3000K


LIGHT SOURCE

Light source	Integrated LED
Number of light points	1
Light source included	Yes
Luminous flux	542 lm
Power	9W
Efficacy	60.22 lm/W
Colour temperature	2700K/3000K
Colour rendering (CRI)	90
Beam angle	37°
Lifetime	30000h
LED replaceable	Not replaceable
Energy class	G
Dimmable	Yes — Phase-cut leading-edge (TRIAC)

ELECTRICAL

Mains voltage	230V
Driver included	Yes
IP rating	IP20
Protection class	Class I (earthed)

DIMENSIONAL DRAWING

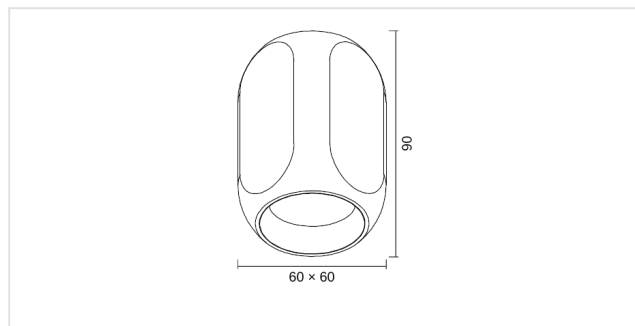

Dimensions in mm. Not to be used as an installation drawing.

ITEM NUMBERS AND EAN

ITEM NUMBER	VERSION	EAN	EPREL
29C300011B8	Black	5407004005393	2532128
29C300011W8	White	5407004005416	2532179
29C300011BA8	Brushed brass	5407004006727	2532172
29C300011BBR8	Brushed bronze	5407004008578	2532175

INSTALLATION

Mounting location	Ceiling
Mounting type	Surface
Use	Interior
Adjustability	Fixed

DIMENSIONS

Width	60 mm
Height	90 mm
Depth	60 mm

MATERIAL

Material	Aluminium
----------	-----------

IN THE BOX

Included	Fixture, Light source, LED driver, Mounting hardware, Manual
----------	--

LOGISTICS AND STANDARDS

Warranty	5 years
HS code	9405 11 90
Country of origin	China

Installation. Class I: the luminaire must be earthed. The electrical installation should be carried out by qualified personnel only, according to the regulations for electrical and mechanical safety in your country. Always switch off electricity supply before installation and maintenance.