

Dimmable LED driver 350-500 mA 10W

Item number P02A10355011 · Absinthe Lights

The dimmable LED driver 350-500 mA 10W supplies constant current, set by DIP switch to 350, 400, 450 or 500 mA at 12-20V. For LED modules and luminaires without a built-in driver.

PRODUCT



FEATURES

- 350, 400, 450 or 500 mA, 12-20V DC
- Leading and trailing edge, 10-100%
- Class II, IP20, 129 × 44 × 23 mm


OUTPUT

Type	Constant current (CC), selectable current
Output current	350-500 mA
Output voltage	12-20V DC
Output power	4.2-10W
Efficiency	81 %
No-load power	≤ 0.5W
Dimmable	Yes — Phase-cut leading-edge (TRIAC), Phase-cut trailing-edge (ELV)
Protections	Short-circuit, Overload
Terminals	Push-in terminal
Ambient temperature	-20...+50 °C

ELECTRICAL

Mains voltage	230V
IP rating	IP20
Protection class	Class II (double insulated)

DIMENSIONAL DRAWING

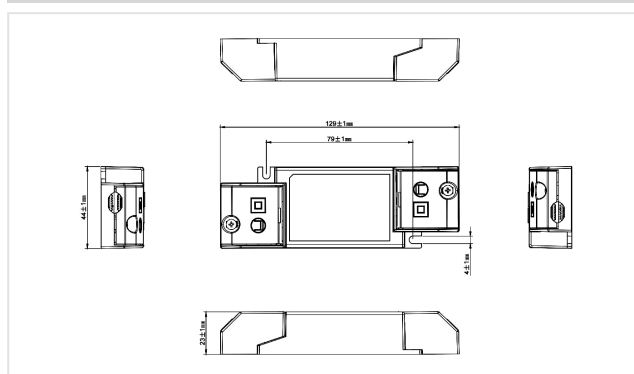

Dimensions in mm. Not to be used as an installation drawing.

ITEM NUMBERS AND EAN

ITEM NUMBER	VERSION	EAN
P02A10355011	White	5407004003559

INSTALLATION

Use	Interior
-----	----------

DIMENSIONS

Length	129 mm
Width	44 mm
Height	23 mm

MATERIAL

Material	Plastic
----------	---------

IN THE BOX

Included	LED driver
----------	------------

LOGISTICS AND STANDARDS

Warranty	5 years
HS code	8504 40 83
Country of origin	China

Installation. The electrical installation should be carried out by qualified personnel only, according to the regulations for electrical and mechanical safety in your country. Always switch off electricity supply before installation and maintenance.