

Enso Adjustable LED Recessed light


Family code 30C1SAD11 · collection Enso · Absinthe Lights

The Enso Adjustable is an LED recessed spotlight for a Ø80 mm cut-out that tilts up to 30°. 6W Deco module, CRI 90, 50° beam. Ø90 × 80 mm, 350 mA driver sold separately.

PRODUCT



DIMENSIONAL DRAWING

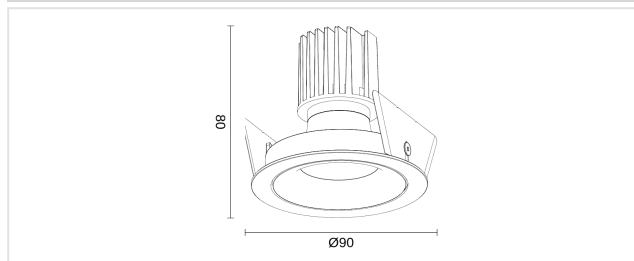

Dimensions in mm. Not to be used as an installation drawing.

ITEM NUMBERS

ITEM NUMBER	VERSION	LUMINOUS FLUX
30C1SAD11BB2	Black · 2700K	398 lm
30C1SAD11BB3	Black · 3000K	415 lm
30C1SAD11BBR2	Black/Bronze · 2700K	398 lm
30C1SAD11BBR3	Black/Bronze · 3000K	415 lm
30C1SAD11BG2	Black/Gold · 2700K	398 lm
30C1SAD11BG3	Black/Gold · 3000K	415 lm
30C1SAD11BS2	Black/Silver · 2700K	398 lm
30C1SAD11BS3	Black/Silver · 3000K	415 lm
30C1SAD11BW2	Black/White · 2700K	398 lm
30C1SAD11BW3	Black/White · 3000K	415 lm

LIGHT SOURCE

Light source	Integrated LED
Number of light points	1
Light source included	Yes
Luminous flux	per version, see table
Power	6W
Colour temperature	per version, see table
Colour rendering (CRI)	90
Beam angle	50°
Lifetime	55000h
LED replaceable	Yes, by user
Dimmable	Yes

ELECTRICAL

Driver included	No
IP rating	IP20
Protection class	Class III (SELV)

ITEM NUMBER	VERSION	LUMINOUS FLUX
30C1SAD11WB2	White/Black · 2700K	398 lm
30C1SAD11WB3	White/Black · 3000K	415 lm
30C1SAD11WBR2	White/Bronze · 2700K	398 lm
30C1SAD11WBR3	White/Bronze · 3000K	415 lm
30C1SAD11WG2	White/Gold · 2700K	398 lm
30C1SAD11WG3	White/Gold · 3000K	415 lm
30C1SAD11WS2	White/Silver · 2700K	398 lm
30C1SAD11WS3	White/Silver · 3000K	415 lm
30C1SAD11WW2	White · 2700K	398 lm
30C1SAD11WW3	White · 3000K	415 lm

FEATURES

- 350 mA constant current, driver separate
- Ø80 mm cut-out, 80 mm recess depth

INSTALLATION

Mounting location	Ceiling
Mounting type	Recessed
Use	Interior
Adjustability	Tilts up to 30°
Ceiling type	Solid (concrete) · Hollow (plasterboard)
Cut-out	Ø80 mm
Recessed depth	80 mm

DIMENSIONS

Height	80 mm
Diameter	Ø90 mm

MATERIAL

Material	Aluminium
Finish	Powder coated, Painted

IN THE BOX

Included	Fixture, Light source, Spring clips, Manual
Not included	LED driver

LOGISTICS AND STANDARDS

Warranty	5 years
HS code	9405 11 90
Country of origin	China

Installation. The electrical installation should be carried out by qualified personnel only, according to the regulations for electrical and mechanical safety in your country. Always switch off electricity supply before installation and maintenance.